

www.totolink.net

The Smartest Network Device



150Mbps Wireless N Fiber Router

Model No. F1



Intelligent QoS



150Mbps



Fiber WAN

Overview

150Mbps Wireless N Fiber Router

Model No. F1

F1 is a wireless N Fiber Router with one high gain antenna.

It allows users to access Internet by DHCP/PPPoE/Static

IP/PPTP/L2TP and can deliver up to 150Mbps wireless data rate.

With the fiber-optic WAN port, this device makes user access internet in an easy, enjoyable and secure way better than ever.

Besides, it is good for simultaneously IPTV experience and Internet surfing via VLAN function.

So F1 is a high performance and cost-effective solution for users connecting Internet by fiber-optic.



Features

- Complies with IEEE 802.11n/g/b standards for 2.4GHz Wireless LAN.
- Up to 150Mbps data rate for Wi-Fi network.
- One fiber WAN port for fiber optical network connection.
- Supports PPPoE, DHCP, Static IP, PPTP and L2TP broadband functions.
- Provides 64/128-bit WEP, WPA, WPA2 and WPA/WPA2 (TKIP+AES) security.
- Multiple APs function allows users to add more SSIDs accordingly.
- The IP, MAC, Port and URL filtering makes access and time control more flexibly.
- Supports VPN Pass-Through based on IPSec/PPTP/L2TP/IPv6.
- Repeater function expands the wireless coverage and allows more terminals to access Internet.
- VLAN function makes the network management more secure and efficient.
- QoS function allocates network bandwidth reasonably.



Specification

Hardware

Interface - 4 *10/100Mbps LAN Ports

- 1 *10/100Mbps Fiber WAN Port

Power Supply - 9V DC/0.8A


Antenna - 1 *5dBi Fixed Antenna

Button - RST/WPS Button

- Power ON/OFF Button

LED Indicators - 1 *Power, 1 *CPU, 1 *Wireless, 1 *WAN, 4 *LAN

Dimensions (L x W x H) - 6.0 x 3.7 x 0.9 ln (152 x 94 x 24mm)

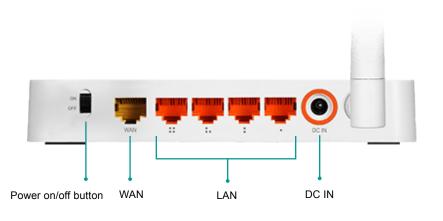

Wireless

Standards - IEEE 802.11n, IEEE 802.11g, IEEE 802.11b

RF Frequency - 2.4~2.4835GHz

Data Rate - 802.11n: up to 150Mbps

- 802.11g: up to 54Mbps (dynamic)- 802.11b: up to 11Mbps (dynamic)

EIRP < 20dBm

Wireless Security - 64/128-bit WEP, WPA/WPA2 (AES/TKIP)

Reception Sensitivity - 135M: -65 dBm@10% PER

- 54M: -68 dBm@10% PER - 11M: -85 dBm@8% PER

- 6M: -88 dBm@10% PER

- 01vi. -00 UDITI@ 10-70 F LN

- 1M: -90 dBm@8% PER

Specification

Software

Operation Mode	- Wireless ISP Client Router - Wireless Client - Repeater(Range Extender) - Router - Bridge with AP - Client
WAN Type	- DHCP/Static IP/PPPoE(Dual access)/PPTP(Dual access) /L2TP(Dual access)
IPv6 Network	- WAN Setting, LAN Setting, RADVD for IPv6, IPv6 Tunnel to IPv4
Wireless Functions	- Multiple SSID, MAC Authentication, Universal Repeater, WDS, WPS, IPTV
Schedule	- Reboot Schedule, Wireless Schedule
Firewall	- SPI Firewall, MAC Filtering, IP Filtering, Port Filtering, URL Filtering, Port Forwarding, DMZ, NAT Mapping
Management	- QoS, TR-069 config, DDNS, SNMP, DoS, Notice Setting, Access Control, Refresh Buffer Memory, etc.

Others

Package Contents	- F1 Wireless Router *1 - Power Adapter *1 - Ethernet Cable *1 - Quick Installation Guide *1
Environment	- Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ (32 $^{\circ}F \sim 104^{\circ}F$) - Storage Temperature: $-40^{\circ}C \sim 70^{\circ}C$ (-40 $^{\circ}F \sim 158^{\circ}F$) - Operating Humidity: $10\% \sim 90\%$ non-condensing - Storage Humidity: $5\% \sim 90\%$ non-condensing

ZIONCOM (HK) TECHNOLOGY LIMITED

Copyright 2018 ZIONCOM (HK) TECHNOLOGY CO., LTD. All Rights Reserved.

Headquarter & R&D Center

7/F, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Tel : +86-755-6136-3288 (Ext. 851) | FAX : +86-755-6136-3344

Factory

Building A1 & A2 Lantian Technology Park, Xinyu Road, Xinqiao Henggang Block, Shajing Street, Baoan District, Shenzhen, Guangdong, China