



The Smartest Network Device

www.totolink.net

LR1200GB

4G+ Cat6
AC1200 Wireless Dual Band
Gigabit Router



4G LTE



4G antennas



300Mbps+867Mbps



SIM Card Slot



Max 64 Users

➤ Overview

4G+ Cat6 AC1200 Wireless Dual Band Gigabit Router

Model No. **LR1200GB**

The LR1200GB is a wireless dual-band 4G LTE router that complies with the most advanced 802.11ac standards and offers WiFi speeds up to 1167Mbps. Convenient 4G network access, while share your 4G LTE network with multiple Wi-Fi devices ,that all Wi-Fi devices instantly enter 4G era and enjoy exclusive 4G Wi-Fi.



➤ Features

- Complies the IEEE 802.11ac/a/b/g/n standards.
- Supports 4G+ Cat6 to boost the data speeds of up to 300Mbps.
- Creates a simultaneous dual band Wi-Fi network ,with maximum speeds of up to 300Mbps on the 2.4GHz band and 867Mbps on the 5GHz band.
- MU-MIMO supported – simultaneous data streams increase WiFi throughput and network efficiency.
- 4 high-gain antennas, WiFi signal is stronger, 4G signal is better.
- Full gigabit ports offer larger capability for data forwarding via cable connection.
- Supports the LTE-FDD,LTE-TDD,WCDMA,GSM network type.
- Requires no configuration ,just insert a SIM card and turn it on to enjoy a fast wireless connection.
- Provides 64/128-bit WEP, WPA, WPA2 and WPA/WPA2 encryptions.
- Supports IP, MAC, URL filtering , Port Forwarding and DMZ
- Supports high standard of 8KV/15KV ESD protection.
- With built-in 4G SIM card slot, allowed to share 4G Wi-Fi with your simply by plugging one 4G SIM car.

Selling point

➤ Superfast 4G+ LTE Speed & Simultaneous Dual Band WI-FI

Supports the 4G+ Cat6, which used Carrier Aggregation technology, download speed up to 300Mbps and upload speed up to 50Mbps.

Supports to share the Internet with up to 867Mbps on 5GHz and 300Mbps on 2.4GHz.



➤ Plug and play, Easy access


Two internet access modes are interchangeable to adapt to various environments

1. Use SIM card, connect to the Internet wirelessly.
2. Use RJ45 cable, access to the Internet via cable connection.




➤ Flexibility WAN network connect design

While supporting 4G network connection, LR1200GB adds WAN network connection design to fully meet different connection types, including cables.

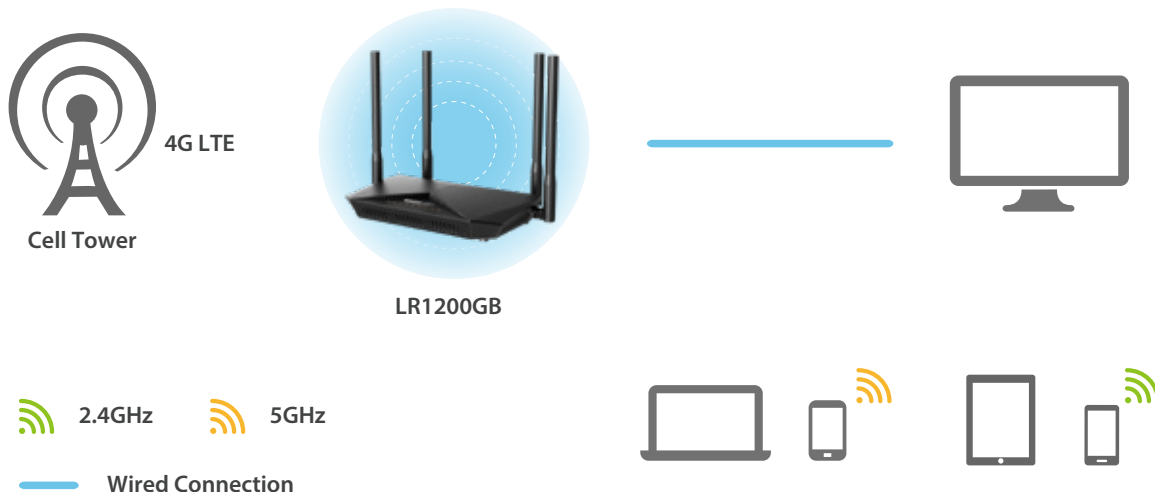

Specification

Hardware

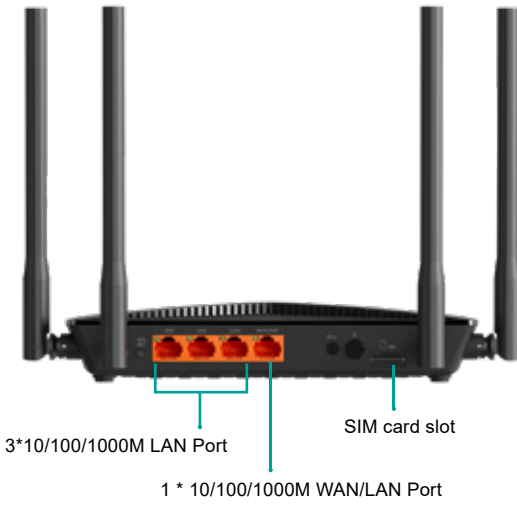Interface	- 1 * 10/100/1000M WAN/LAN Port - 3 * 10/100/1000M LAN Port
Power Supply	- 1 * Standard SIM card slot
Button	- 12 VDC / 1A - 1 *RESET Button
LED Indicator	- 1 *Sys, 1 *SMS, 1 *5G WIFI, 1 *2.4G WIFI, 1*LTE,4*Signal - 1 *WAN/LAN, 3 *LAN
Antenna	- 2 * 5dBi internal antennas (2.4G), - 1 * WAN/LAN, 3 * LAN
Dimensions (L x W x H)	- 2 * 5dBi detachable antennas (4G LTE) - 195.5*126.9*28.6(mm)
	

Wireless

Standards	- IEEE 802.11ac, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
RF Frequency	- 2.4GHz/5GHz
Data Rate	- 2.4GHz: Up to 300Mbps - 5GHz: Up to 867Mbps
EIRP	- 2.4GHz < 20dBm
Wireless Security	- 64/128-bit WEP, WPA and WPA2
Reception Sensitivity	- 2.4G:11b 11M: -81dBm@8% PER 11g 54M: -68dBm@10% PER 11n HT20 MCS7: -65dBm@10% PER HT40 MCS7: -62dBm@10% PER - 5G: 11a 54M: -68dBm@10% PER 11n HT20 MCS7: -65dBm@10% PER HT40 MCS7: -62dBm@10% PER 11ac VHT80 MCS9: -51dBm@10% PER

Specification

LTE Mode

LTE chip (miniPCI-E, optional, customizable) LTE Network Type and Band (1)	<ul style="list-style-type: none">- Qualcomm- FDD: B1/B3/B5/B7/B8/B20/B28/B32- TDD: B38/B40/B41- WCDMA: B1/B3/B5/B8
--	--

Software

Home State WAN Type Wireless Functions Firewall Management Device capacity	<ul style="list-style-type: none">- WAN information, LAN information, System information- Static IP, DHCP, PPPoE, 4G- Multiple SSIDs, MAC Authentication, WPS- MAC Filtering, IP/Port Filtering, URL Filtering, DMZ- Password, System Config, Time Setup, Firmware update, System Log- 2.4G: Max 64 users- 5G: Max 64 users
---	---

Others

Package Contents	<ul style="list-style-type: none">- LR1200GB Wireless Router * 1- Power Adapter * 1- Ethernet Cable * 1- SIM Adapter (Nona, Micro)- Quick Installation Guide * 1
Environment	<ul style="list-style-type: none">- Operating Temperature: 0°C~50°C (32°F~122°F)- Storage Temperature: -40°C~70°C (-40°F~158°F)- Operating Humidity: 10%~90% non-condensing- Storage Humidity: 5%~90% non-condensing

ZIONCOM (HK) TECHNOLOGY LIMITED

Copyright©ZIONCOM (HK) TECHNOLOGY CO., LTD. All Rights Reserved.

Headquarter & R&D Center

7/F, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road,
Nanshan District, Shenzhen, Guangdong, China

Tel : +86-755-3686-1138 | FAX : +86-755-3686-1139

Factory

Building A1 & A2 Lantian Technology Park, Xinyu Road, Xinqiao Henggang Block,
Shajing Street, Baoan District, Shenzhen, Guangdong, China

Tel : +86-755-3686-1188 | FAX : +86-755-3686-1133

LR1200GB

4G+ Cat6
AC1200 Wireless Dual Band Gigabit Router