

A3 wireless SSID password modification setting

It is suitable for: **A3**


Application:

Wireless signals generally refer to Wi-Fi, wireless SSID and wireless password is the wireless terminal to connect the router to the Internet the most important two information. The actual use of the process, if there is no connection on the wireless, forget the wireless password, you need to view or modify the signal SSID and password.

Set up steps

STEP-1: Enter the setup interface

Open the browser, clear the address bar, enter **192.168.0.1**, fill in the administrator account and password (default **admin admin**), Enter the displayed **verification code**, click **Login**, and select **Advance setup** again, as follows:

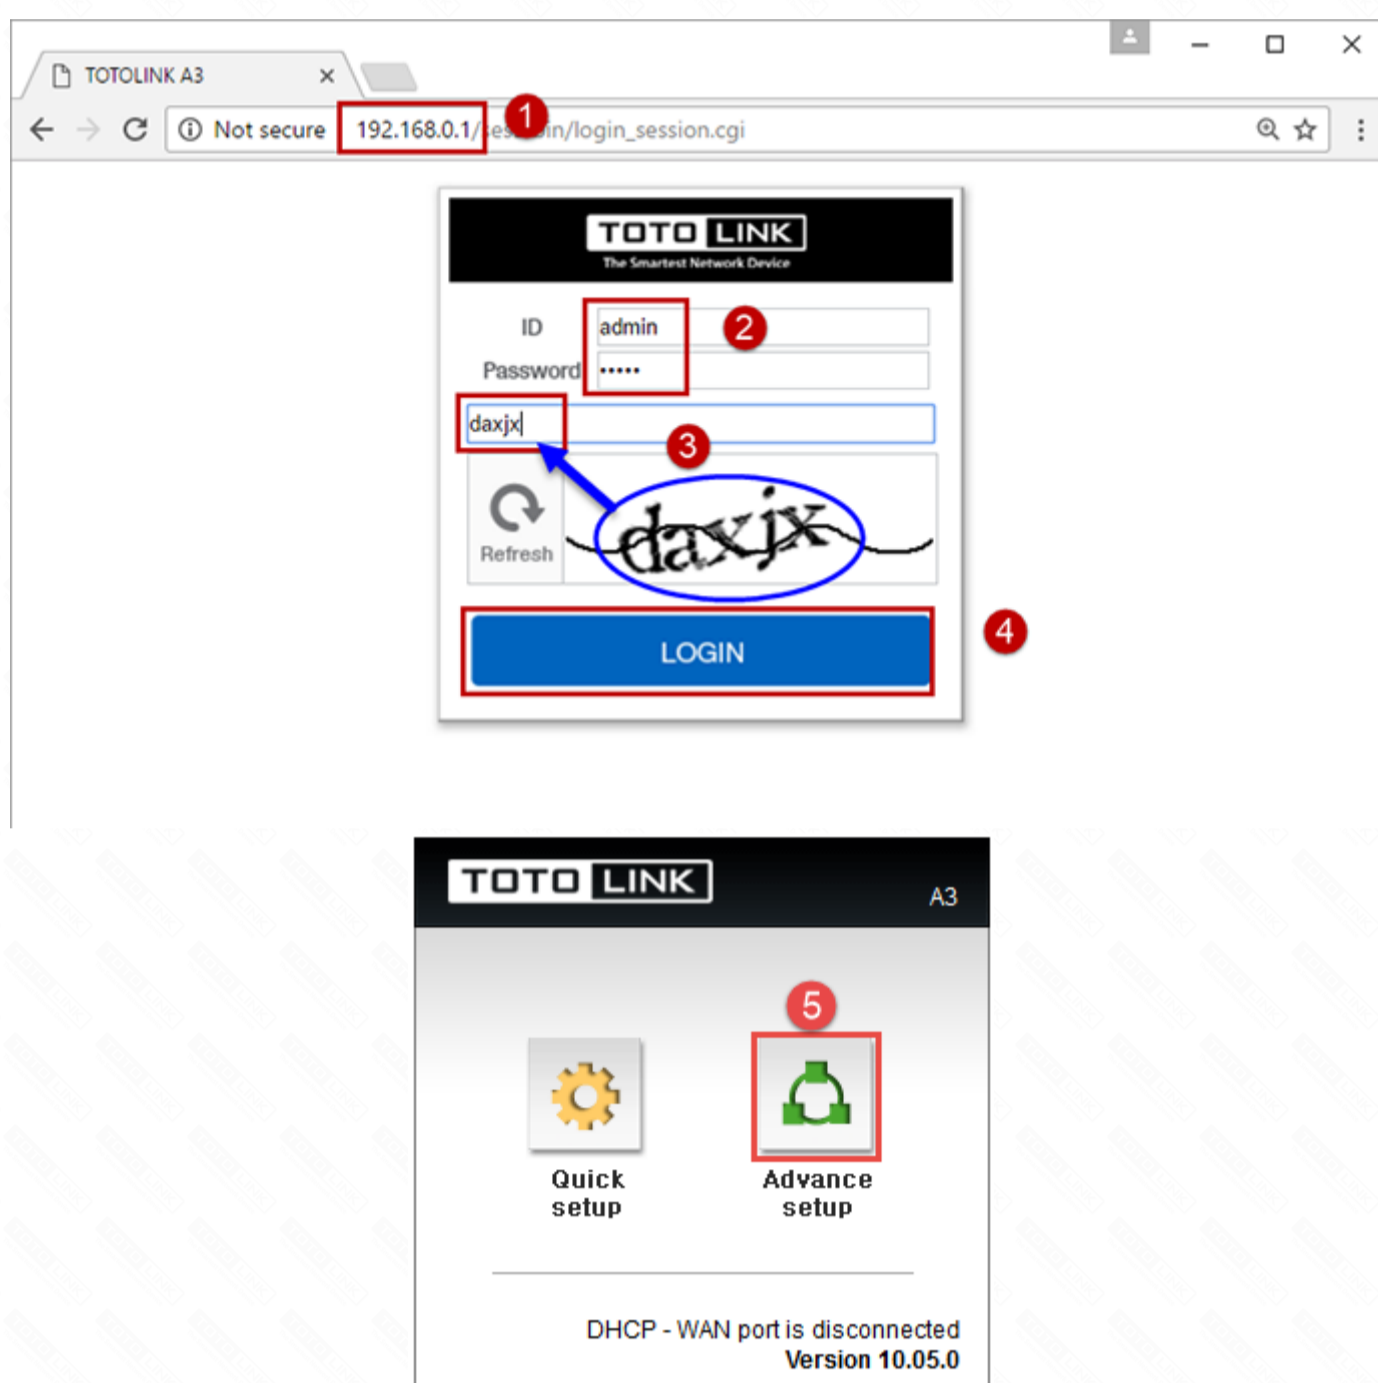


STEP-2: View or modify the wireless parameters


2-1. In the Status Summary to view SSID and Password

Click **Status Summary** to view the SSID and password in **Wireless Status (2.4GHz)** and **Wireless Status (5GHz)**.

Figure, 2.4GHz signal set password, click **View** to View, 5GHz signal does not set the password, do not show the password.

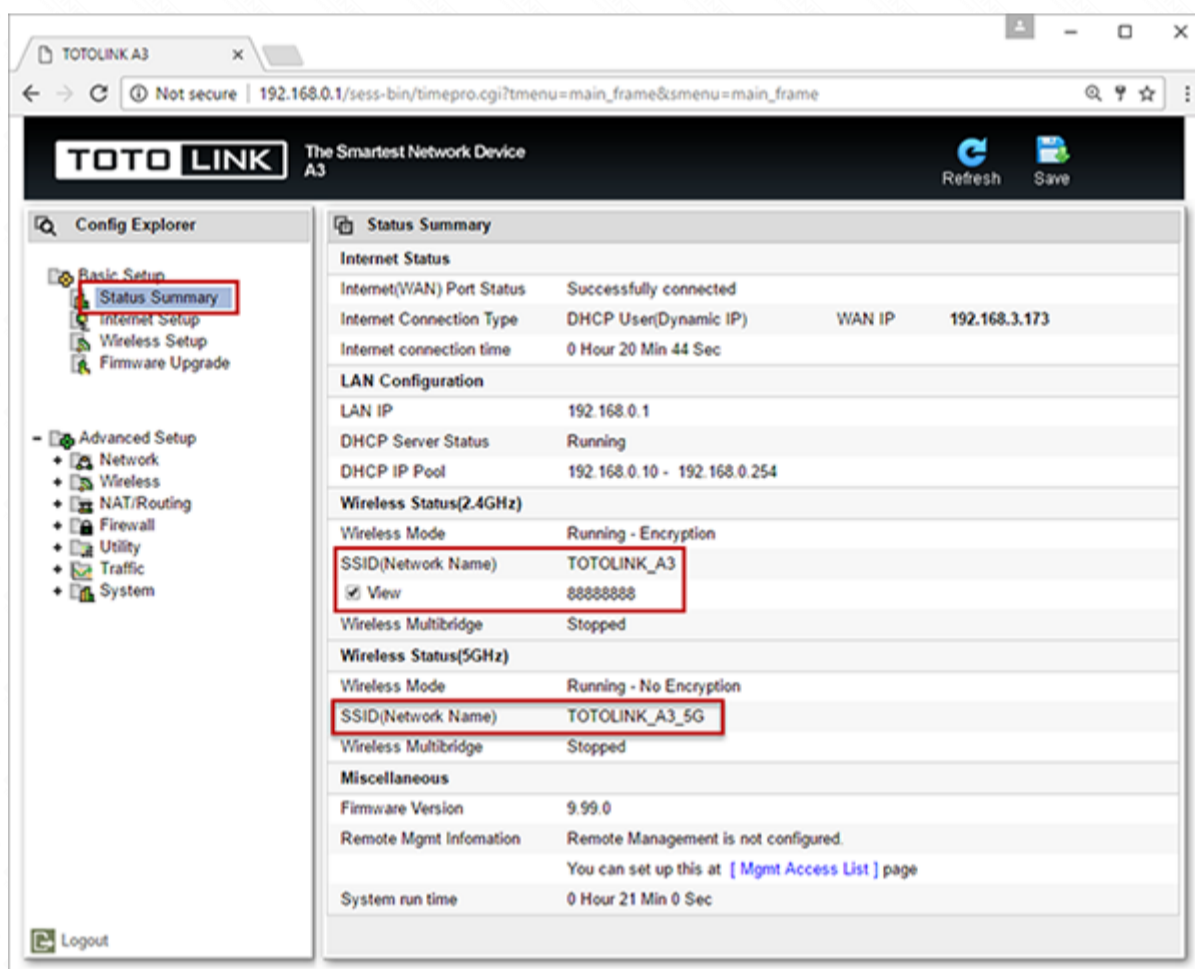

If you are setting up the WIFI SSID and password for the first time. you need to enter the Wireless Setup interface settings, here, to 2.4GHz signal settings as an example (5GHz settings the same). You can modify the **SSID** according to your preferences, select the encryption method (recommended **WPA2PSK + AES (Recommended)**), enter your ready **Password**, click Apply.

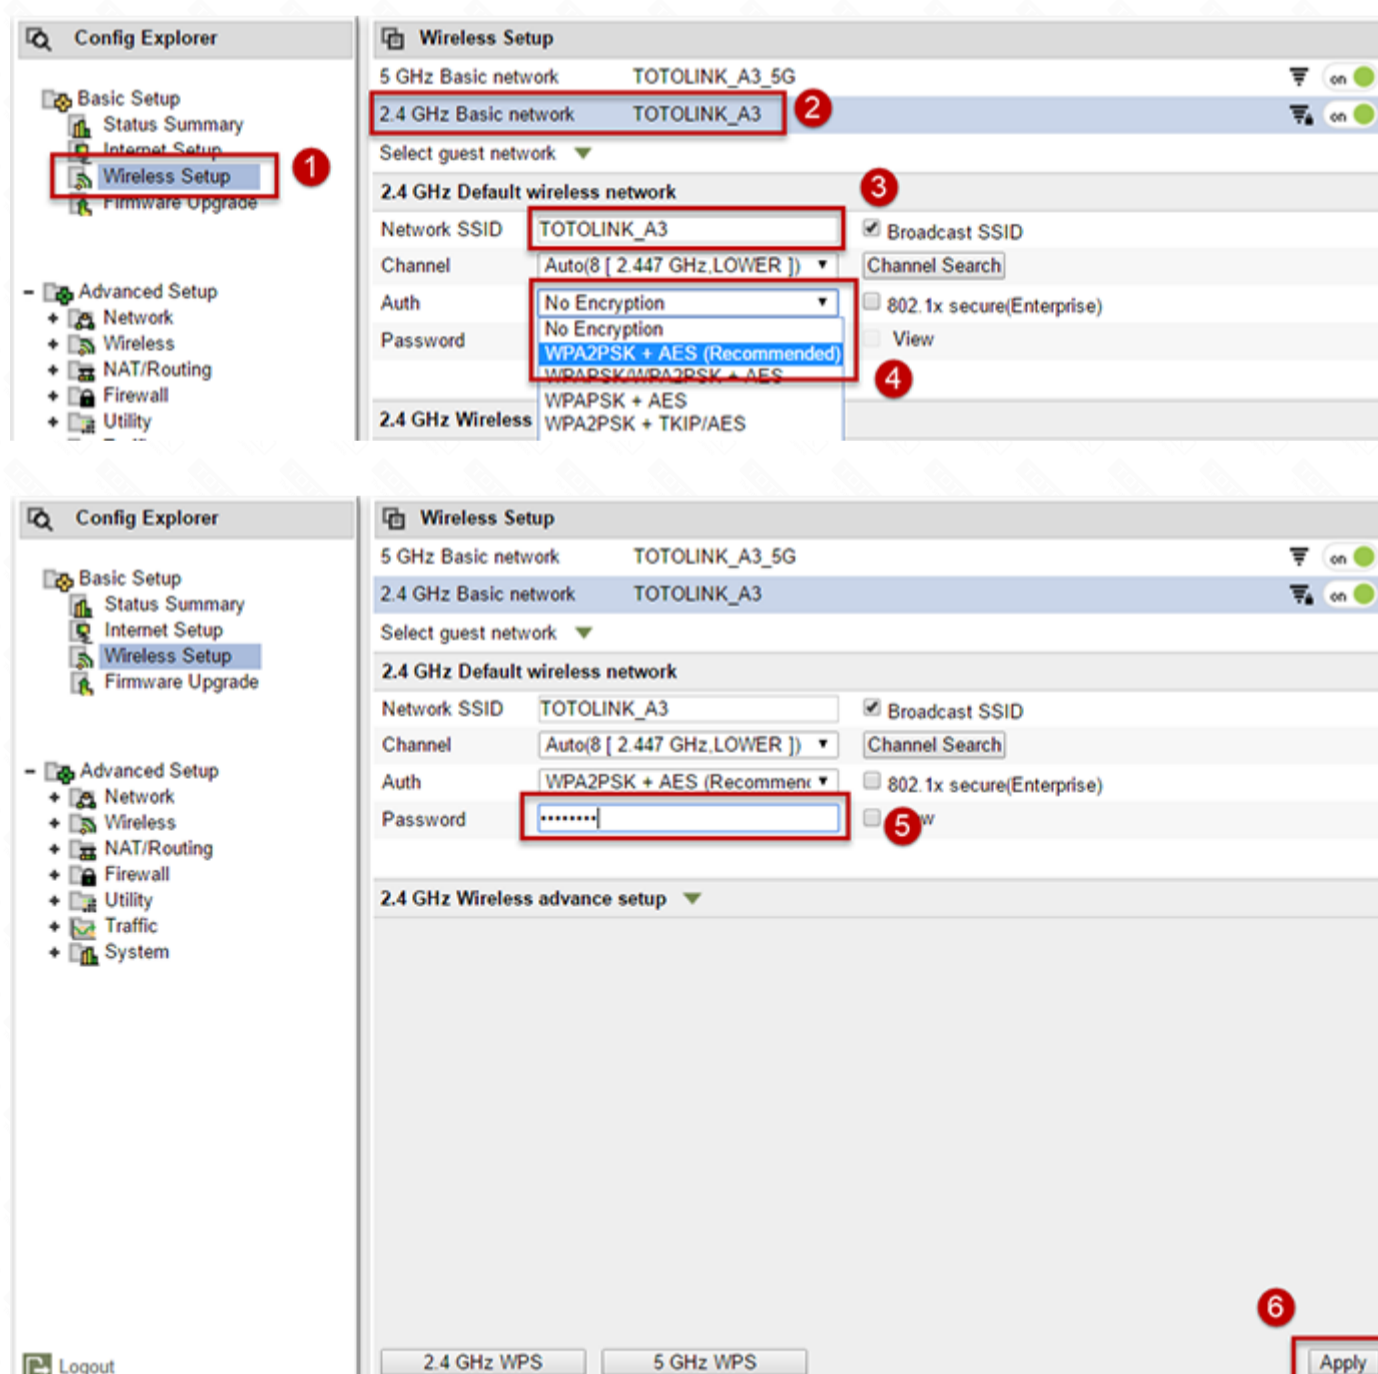

2-2. Check and modify In the Advanced Setup.

Of course, you can also click **Wireless advanced setup** to set more wireless parameters, as follows:

