

**TOTO LINK**  
The Smartest Network Device


**Quick Installation Guide**  
300Mbps In-Wall Wireless AP

Model No.: WA300

V1.1607

Copyrights © TOTOLINK All rights reserved. Website: <http://www.totolink.net>  
Information in this document is subject to change without prior notice.

# 1 Hardware Installation

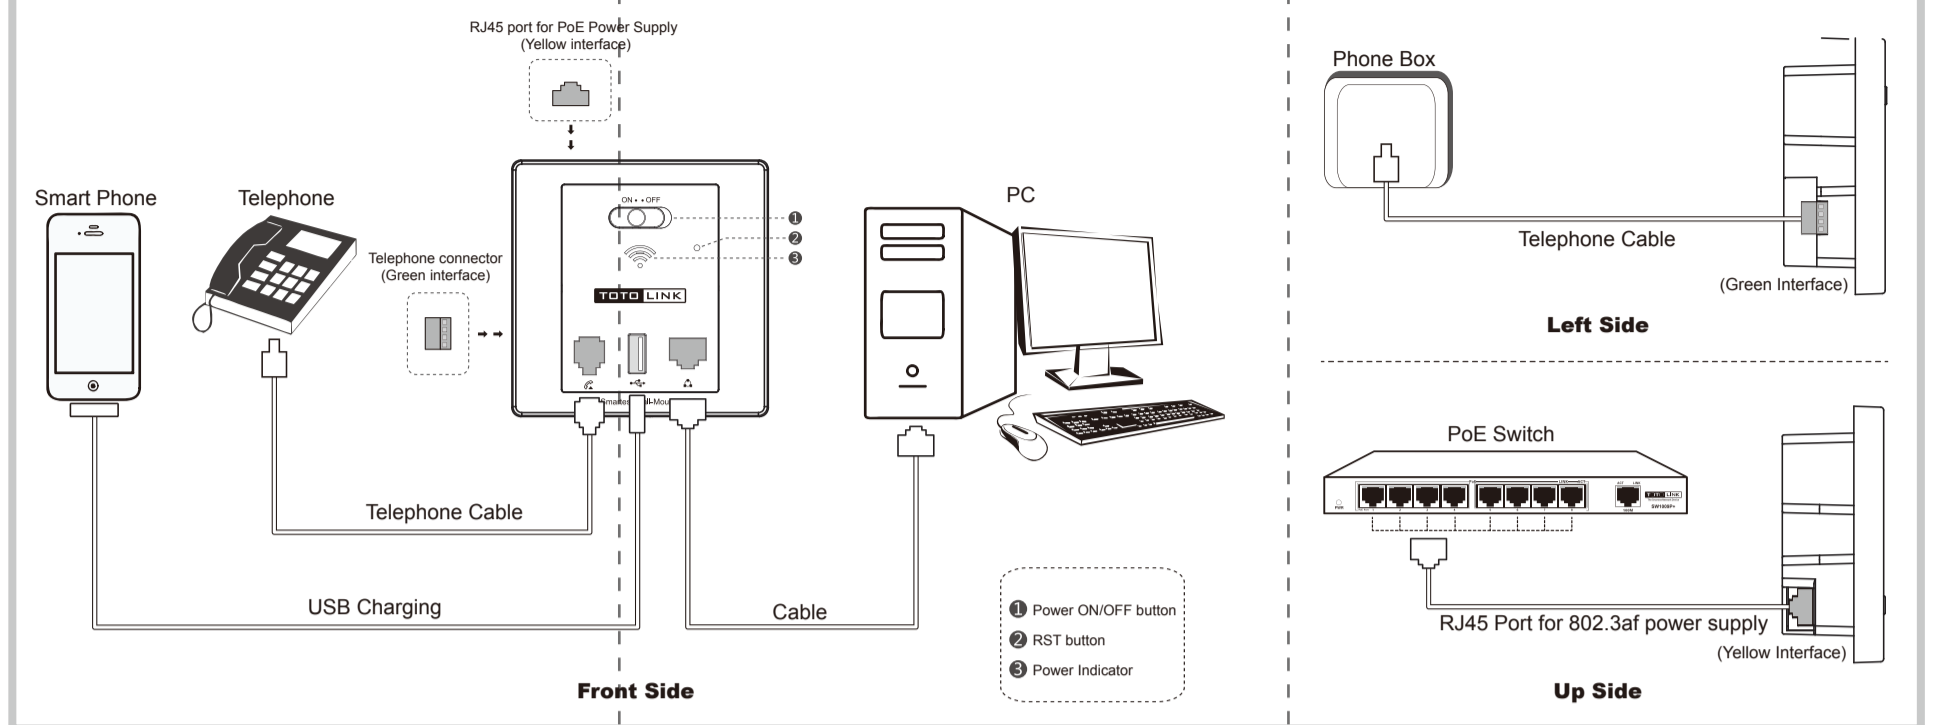

# 2 Set Up PC

**Windows Vista/7** For Windows Vista or Windows 7 Operating System, please comply with following steps to set up.

- Click **Start—Control Panel—Network and Internet—Network Connection**, right-click **Local Area Connection**, and choose **Properties**.
- Double-click **Internet Protocol Version 4 (TCP/IPv4)**.
- Choose "Use the following IP address", IP address: **192.168.0.5**, default gateway: **192.168.0.254**. Click **OK-OK**.

**Windows 10** For Windows 10 Operating System, please comply with following steps to set up.

- Click **Start**—**All apps**—**Windows System—Control Panel—Network and Sharing Center—Change adapter setting**, right-click **Local Area Connection**, and choose **Properties**.
- Double-click **Internet Protocol Version 4 (TCP/IPv4)**.
- Choose **Use the following IP address**, IP address: **192.168.0.5**, Default Gateway: **192.168.0.254**. Click **OK—OK**.

# 3 Set Up AP (Two Options)

You are allowed to set up one WA300 directly or centrally manage multiple APs by Wireless LAN controller AC500.

## Option 1:

For single one WA300 configuration, please follow below steps:

- Run any Web browser.
- Type **192.168.0.254** in the web browser, then press **Enter** key.
- Enter User Name and Password (the default User Name and Password are **admin**), then click **LOGIN** or press Enter key.
- Now you can see the WA300's **Web Setting** page.
- Choose **Wireless—Basic Setting** to setup **Wireless SSID** (network name) and Wi-Fi password. WPA2-PSK security mode is recommended, password length should be 8-13 digits or letters.
- click **Apply** to make all settings work.

## Option 2:

For houses having multiple In-wall APs, please follow below steps:

- Run any web browser, type **192.168.0.253** in the web browser, then press Enter.
- Input the User Name and Password, then click **LOGIN** (The default User Name and Password are **admin**).
- Now you have logged into the AC500's Web Management Interface. The first page **AP Scan** allows you to bind all in-wall APs to this WLAN controller. (Here you can find the final **Gateway** of each AP).
- Then you can check all APs' working status by clicking **AP Status**.

# 4 Wireless Network Connection

Now you can access Wi-Fi network by WA300.

- Right-click "My Network Places", click "Properties".
- Right-click "Wireless Network Places", click "View Available Wireless Networks".
- Choose the wireless network name (SSID) you have set for WA300, click "Connect".
- Input the encryption key and click "Connect".
- Have connected wireless network, you can access Internet through wireless mode.

- Also you can create multiple AP Groups to centrally setup and manage APs. Only APs in **AP Group** can be managed unifiedly.
- The **AP Extra Setting** allows you to setup one AP separately.
- AP Management** is designed to configure the AP Group's unified settings, including reboot setting, firmware management, login password and default settings.

For more instructions about AC500, please check the AC500's **User Manual**.